

Cement Colors

BONSAL® Cement Colors are synthetic mineral oxide additives used to color cement products.

FEATURES AND BENEFITS:

- Durable
- Ultraviolet Resistant
- Chemical Resistant
- Indoor or Outdoor Use

USES:

Coloring of:

- Mortar
- Cementitious Coatings
- Concrete
- Plaster
- Tile Grout
- Stucco

PREPARATION:

Prepare the substrate as required for the product being colored.

MIXING:

Thoroughly preblend Cement Color with dry powder cement product before adding mix water. Add 2/3 of suggested mix water and mix until all material is of a uniform color. Add the balance of the water and mix to a workable consistency.

PLACEMENT:

- One lb. per 80 lb. bag of concrete, sand, stucco, or mortar mix.
- On other applications, up to 5 lbs. of Cement Color can be added per 94 lbs. of Portland Cement or 3 lbs. per 70 lbs. of masonry cement.

The color and amount needed will vary depending on the color of sand, cement, or other material mixed with Cement Color.

To test results, mix a small amount and apply to a concrete block. The color appears darker when freshly applied and lightens to its final color when dry.

Place mixture according to the corresponding product literature.

CURING:

Cure according to the corresponding product literature. Immediately apply a curing compound formulated for colored work or cover the entire area with polyethylene sheets. Make sure there are no air pockets. After the curing, the floor can be washed, polished, or waxed.

LIMITATIONS:

- **DO NOT** use brown for tan or beige applications.
- **DO NOT** mix at a rate of more than 5 lbs. per 100 lbs. of cement or plaster. Cement content varies depending on product.
- **DO NOT** allow to dry out during curing.

COLORS:

- Beige
- Black
- Brown
- Red
- Yellow
- Green

PACKAGING:

1 lb. Box

SHELF LIFE:

One year from date of manufacture.

CAUTION: Contains iron oxide or chromium oxide (green). Avoid inhalation of dust. Nuisance dust eye irritant. Flush with water. For eyes get prompt medical attention.


KEEP OUT OF REACH OF CHILDREN.

Technical Assistance

**Charlotte, NC
(800) 334-0784**

Home Office

**Charlotte, NC
Telephone#: (704) 525-1621
Toll Free #: (800) 738-1621
Fax#: (704) 529-5261**

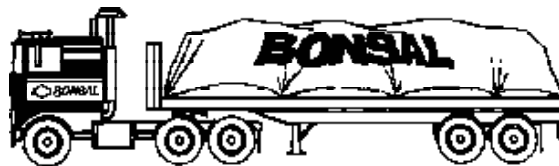

"Bonsal Delivers Solid Solutions"

LIMITED WARRANTY: W.R. Bonsal Company ("Bonsal") warrants that this product and the materials used therein meet or exceed the applicable standards listed and enforced at the time of manufacture. Bonsal will replace any product or part which proves defective due to quality of ingredients used or due to the manufacturing process itself. This Warranty shall apply only if the product is used in strict accordance with applicable specifications and instructions provided by Bonsal for its use, and Bonsal shall not be liable otherwise. Replacement of any defective product, or, at Bonsal's option, refund of the purchase of any defective product shall be the buyer's sole remedy under this Warranty, and Bonsal shall in no event be liable for any damages in excess of the purchase price of the defective product. **BONSAL SHALL IN NO EVENT BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL OR SPECIAL DAMAGES.**

This Warranty constitutes the sole warranty given by Bonsal in connection with this product, and Bonsal has authorized no person to make or give any other warranties or representation, oral or written on its behalf. **IN PARTICULAR, THERE ARE NOT IMPLIED WARRANTIES, INCLUDING WITHOUT EXCEPTION WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** No modification of this Warranty in favor of any buyer shall be valid unless given in writing and signed by an officer of Bonsal.

RES Architectural Sales, Inc.

143 S. Franklin St., Chagrin Falls, OH 44022 • Phone: 440-247-4070 • Fax 440-247-4069
Website: www.resarch.com • Email: sales@resarch.com